

PROMAX

deas

創意 超凡 37
SUPERIOR

THE PROJECT COLLECTION



浦麗華®
石壁地板

TW3789


超越真石真木·體現綠色文明

Extremely realistic design meets the ultimate look



STONE

18" X 18"

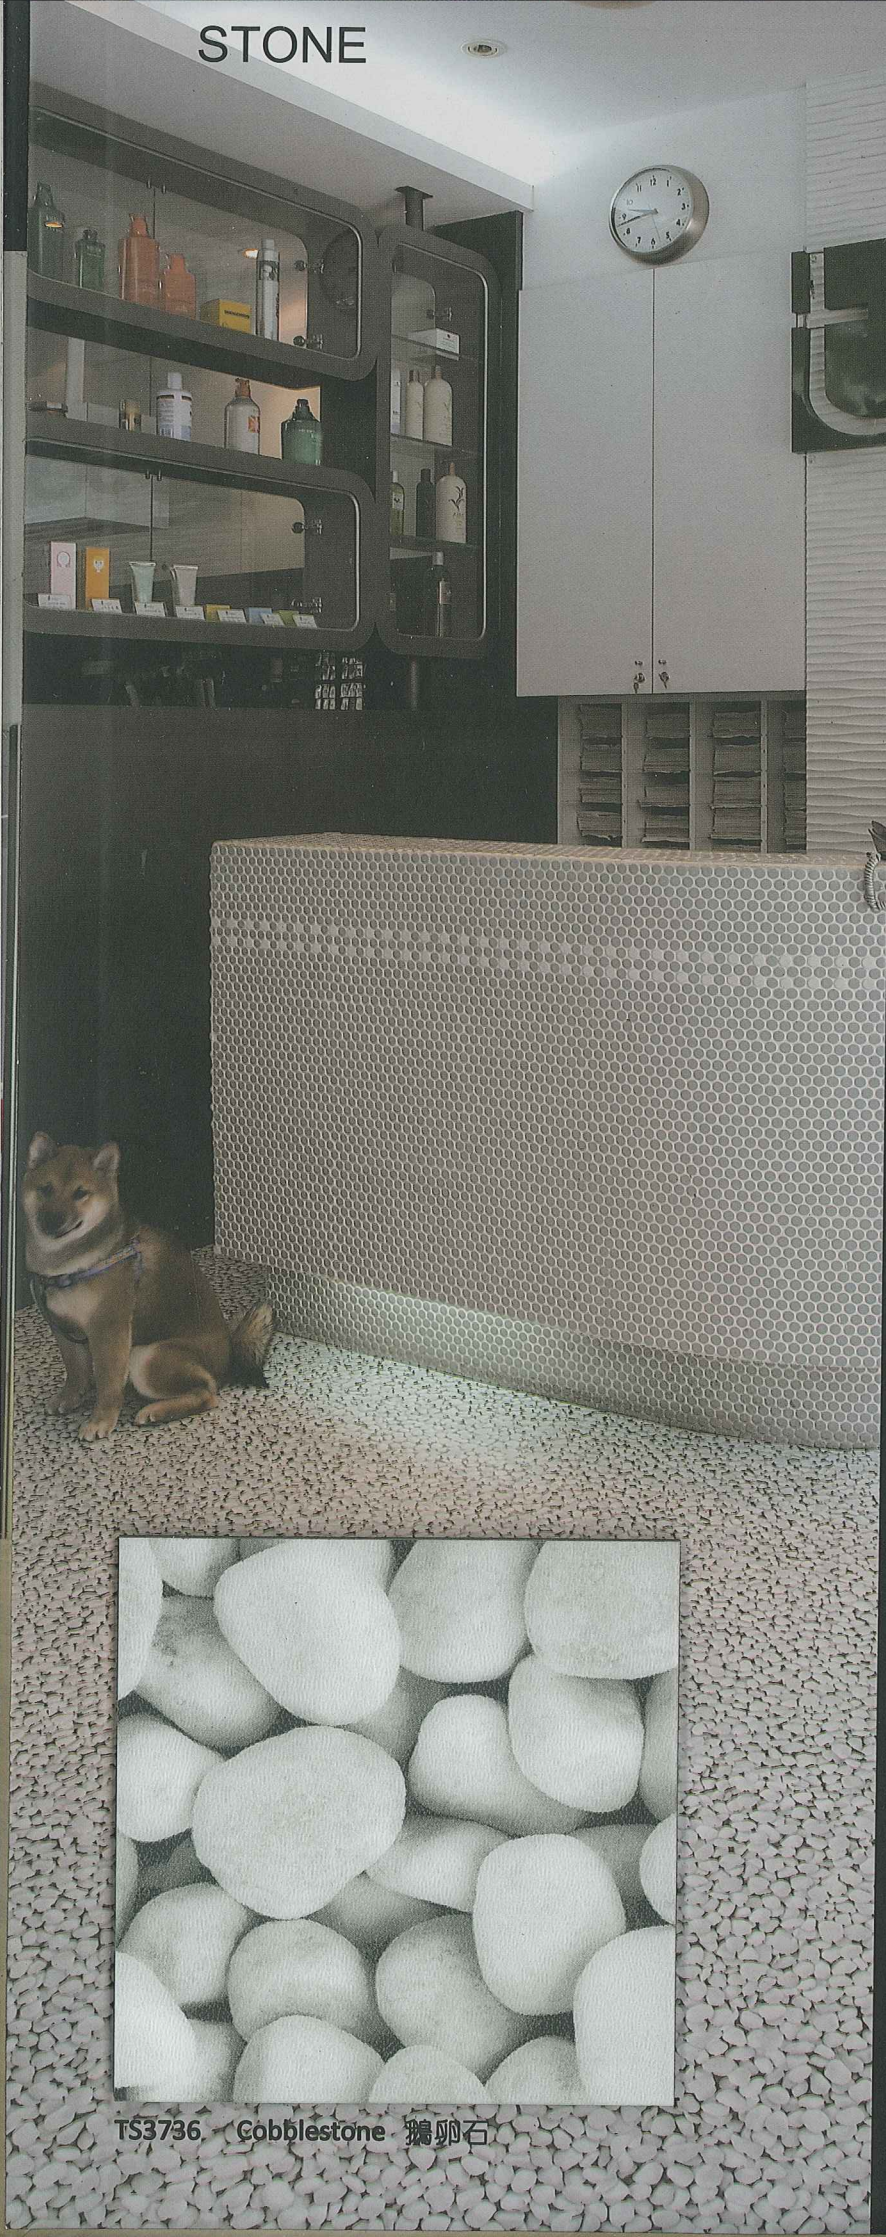


TS3775 Classic Limestone 經典石灰岩



TS3777 Golden Ironstone 金鐵石



TS3735 Black Sandstone 黑色沙岩

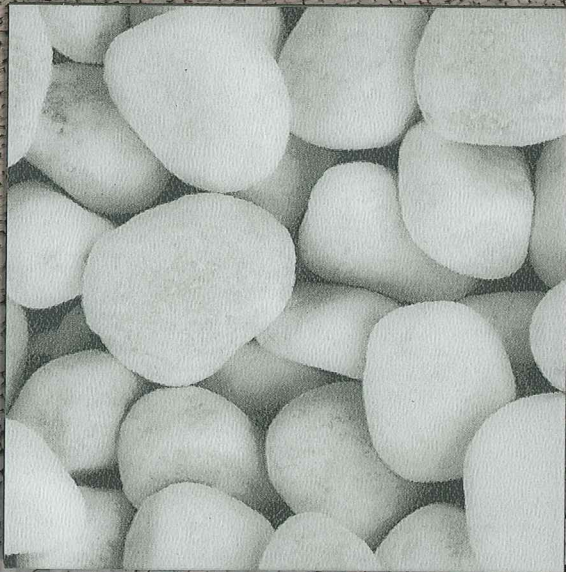


TS3736 Cobblestone 鵝卵石


STONE

18" X 18"

18" X 36"

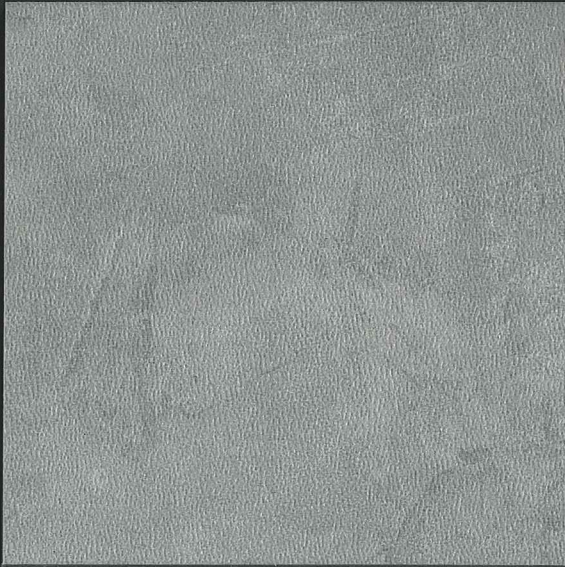

TS3776 Silver Ironstone 銀鐵石

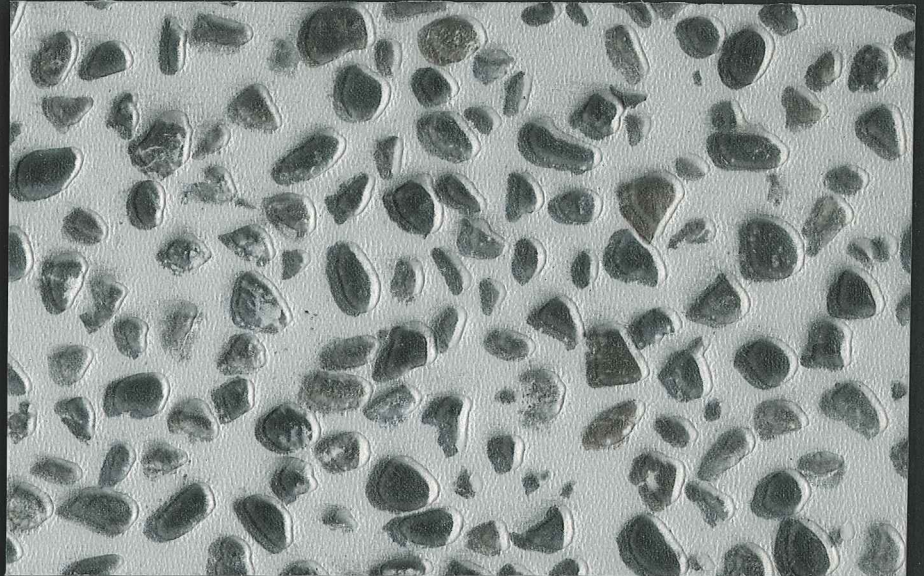


TS3779 Pebblestone 小卵石



TS3734 Grey Quartzite 灰色石英岩



TM3730 Aluminum Rivet Sheet 鉚釘鋁板

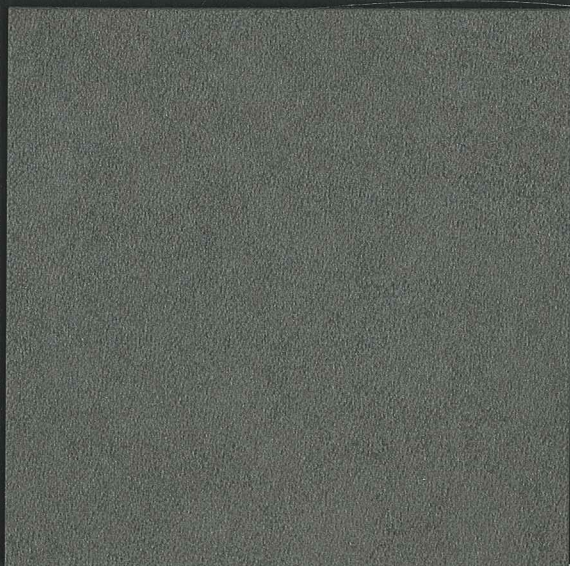

TS3778 Black Limestone 黑石灰岩



TM3734 Black Treadplate 黑色鐵板

Registered Emboss Design
對花浮雕設計



WOOD

6" X 36"



TW3789
Red Beech 紅山毛櫸



TW3790
Ontario Wood 安大略木



TW3791
Classic Oak 經典橡木



TW3721
Burnt Cherry 暴曬櫻桃木



特殊工藝設計 PARTICULAR CRAFTED DESIGN



Beveled edge design
四面倒角



WOOD

6" X 36"



TW3787
Zebrano 胡桃木



TW3788
Antike Kirsche 安緹柯櫻桃木



TW3734
Weathered Hickory 風化山胡桃木



TW3769
Petrified Wood 石化木



TW3726
Mahogany 桃花心木(紅木)

WOOD

8" X 48"





TW3792 White Maple 白色楓木



TW3793 Antique Oak 懷舊橡木



TW3794 Silverd Driftwood 銀色浮木

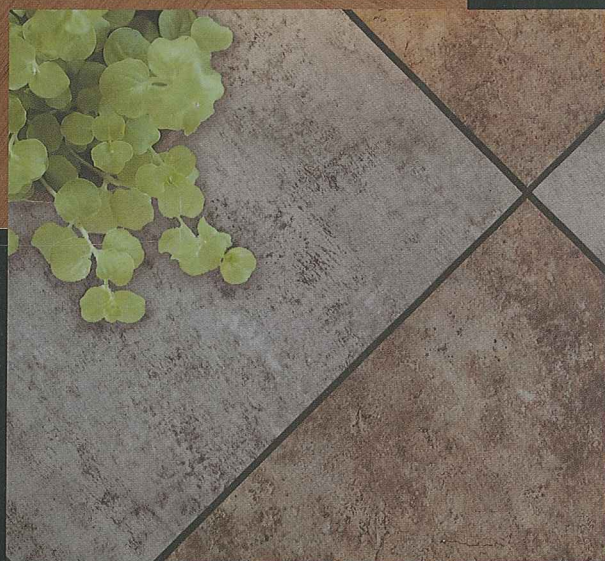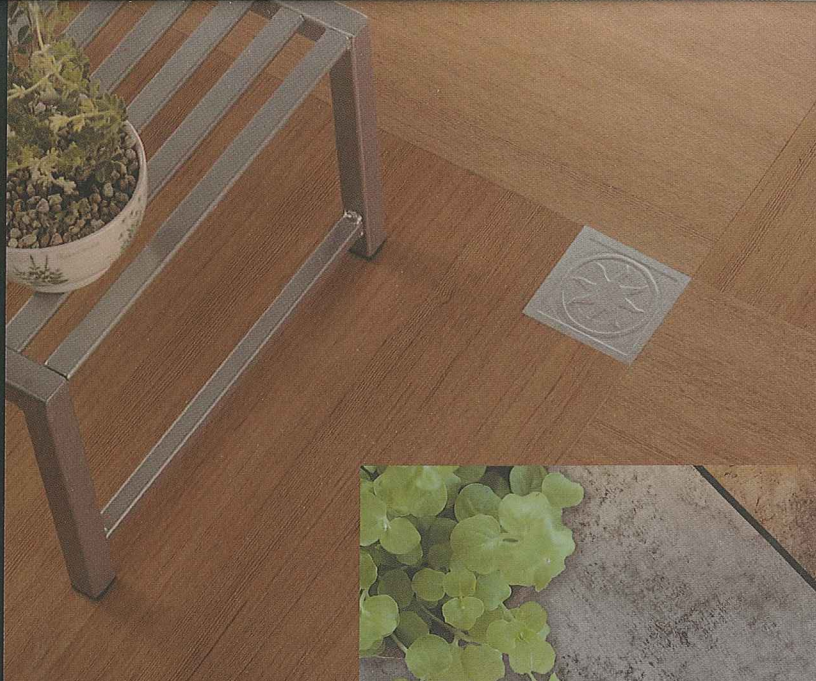

轉角片及飾板 DESIGN BORDERS AND CORNERS

76.2 mm X 76.2 mm - - - - -



MR-S5



MR-S6



MR-B8



MR-B5

101.6 mm X 914.4 mm - - - - - 101.6 mm X 101.6 mm



MR-B1



MR-B3



MR-B2



MR-B4

飾條
FEATURE STRIPS

5 mm X 914.4 mm - - - - -



STRIP-C



STRIP-G
























STRIP-S





性能 PERFORMANCE AND PROPERTIES

 PU表面淋膜處理
Surface treatment

CHARACTERISTICS	TEST METHOD	RESULT
 Thickness-Overall 總厚度	EN 428 GB/T 4085	3.0 mm
 Thickness-Wear layers 耐磨層厚度	EN 429 GB/T 4085	0.70 mm
 Performance classification 性能分類	EN 685	  
 Total weight 總重量	EN 430	19.0 Kg / box
 Dimension 尺寸	EN 427	16pcs / box @18" X 18" =3.34 m ² / box 8pcs / box @18" X 36" =3.34 m ² / box 24pcs / box @ 6" X 36" =3.34 m ² / box 14pcs / box @ 8" X 48" =3.46 m ² / box
 Peeling strength of layers 層與層剝離拉力	EN 431 GB 11982.1	Pass
 Shear forces of layers 層與層剪切力	EN 432	Good
 Residual indentation after static load 殘餘壓痕	EN 433 GB/T 4085	≤0.10 mm
 Dimension stability 收縮與卷曲	EN 434 GB/T 4085	Shrinkage ≤0.25% Curling ≤2 mm
 Flexibility- 10mm mandrel 彈性 -10mm 彎曲度	EN 435	No Damage 無損害
 Wear resistance 耐磨性	EN 660 ASTM F 510	≤2.0 mm ³
 Toxic 有毒物質檢測	EN 71 part 3 GB/T 18586	Complies 無毒
 Color fastness to light 色牢度	EN 20 105-B02 GB/T 4085	≥6 ≥3
 Resistance to fire 防火性	ASTM E84-03	NFPA Class B Bfl-S1,t0
 Slip resistance 防滑性	DIN 51130	R9
 Bearing a castor chair 輪腳適用度	EN 425	Suitable 適用
 Resistance to chemicals 抗化學品腐蝕性	EN 423 ASTM F 925	Class 0
GB/T 4085	聚氯乙烯塊狀地材性能檢測	Pass
GB 8624	B1及 Bfl-S1,t0 燃燒性能檢測	Pass
CNS 8907	聚氯乙烯塊狀地材性能檢測、防焰性能測試	Pass